


Chargetech

20,000mAh PREMIUM PD POWER PACK **USER MANUAL**



Specifications

Type-C power Input/Output x 1

Output Voltage: 20V Output Current(Max): 3.25Amps Maximum Output: 65 W

Type-C power Output x 1

Output Voltage : 20V Output Current(Max) : 2.25Amps Maximum Output: 45 W

USB Power Output x 1

Output Voltage: 5V Output Current(Max) : 3.4Amps Maximum Output: 24W


Weight and Dimensions

Weight: 0.97 lbs

Dimensions: 6.25 in (L) \times 3.4 in (W) \times 0.94 in (H)

What's Included In The Box

- 20,000mAh Portable Power Pack
- 45W PD Charging Adapter and Cable
- User Manual

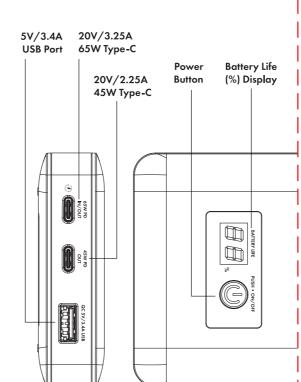

How to Operate Your Battery Pack

To manually power ON/OFF: press and hold down the power button (located on the top of the unit) for 2 seconds. All LED lights/display should turn ON/OFF.

If no power draw is detected after 1 minute, the battery pack will shut off to conserve energy. While the unit is off, press and hold the power button until the battery life screen begins flashing. This activates continuous mode and the entire unit will stay on until manually turned off again.

Recharging your Power Supply can be done with the included 45W PD Charger and Cable but can be charged using up to 65W. The Type-C PD port can also be used to charge your Type-C devices up to a Max of 65W.

While plugged in and charging, the power pack will allow pass-through charging to continue powering whatever is plugged in at the time. If you would like this function disabled while recharging your battery pack, press and hold down the power button for 2 seconds while it is plugged into the wall. Repeat to re-enable all ports for pass-through charging.

Warning: if the battery exceeds a safe operating temperature, due to insufficient ventilation or a high-temperature environment, the unit will automatically

背面

下面

BEFORE

Dimensions: 6.25 in (L) x

3.4 in (W) x .94 in (H)



Warning & Conditions

Keep out of reach of children.

The product may become uncomfortably warm, reaching 140°F (60°C) under extended high power usage. While you are using the product, make sure to keep it away from materials that may be affected by high temperatures

Hold on carefully when inserting or removing a cable. Make sure not to force or bend your cable tip into the charging ports to prevent the tip breaking or damaging of the

Avoid inserting any foreign objects into the ports.

Do not attempt to open, alter, or modify the products.

Additional Safety Guidelines

Do not use the product in temperatures over 115°F (45°C).

Do not expose the product to wet conditions such as water,

Failure to follow these safety guideline may cause personal injury and/or damage to the product. It may also void your product warranty.









How Do I Get Service?

If your product requires troubleshooting, warranty service, or a return within the first 30 days, visit chargetech.com/contact/ or email us at support@chargetechsolutions.com. Dated proof of purchase must accompany the product and the product must not have been disassembled or modified without prior ritten authorization by ChargeTech.

Traveling With Portable Power

The 20K Portable Power Outlet is the perfect companion for raveling on the road and can be recharged in a vehicle by using a

Disclaimer*** The FAA and TSA state that the largest battery containing device, aka a battery pack, allowed on an aircraff is 100 Watt Hours. This Portable Power Pack is 72 Watt Hours, which s well under the safe amount allowable on a flight. and must be taken with you on the flight as carry-on luggage only and cannot be checked in. For more information, visit the FAA and TSA websites.

About the Antimicrobial Coating

The antimicrobial solution used to treat this product contains positively charged silver ions. These silver ions bind favorably to DNA and prevent DNA replication in microbes, rendering them unable to divide or reproduce while in contact with the antimocribial surface. The coating is always on and working to make sure your product is free of microbes such bacteria and viruses. The antimicrobial process is not immediate and takes time to stop

Warranty & Return

What Does This Warranty Cover?

This Limited Warranty is provided by ChargeTech and covers defects in function and materials in your Portable Power Power. This warranty period lasts for 1 year from the date of delivery to the original end user. After 1 year following the date of delivery, the warranty is void and the product will no longer be eligible for exchange. You will be required to provide proof of purchase to make warranty claims.

Warranty does not cover normal wear and tear of the product, and ChargeTech will not be responsible for any defect in or damage to the product if it has been misused, neglected, improperly installed, physically damaged or altered, either internally or externally, or damaged from improper use or being used in an unsuitable environment. If it has been subjected to fire water, general corrosion, biological infestations, or input voltage that creates operating conditions beyond the maximum or mini limits listed in the ChargeTech product specifications including high input voltage from generators and lightning strikes, the warranty claim may be denied and the claimant responsible for any return

Can I Return This Product for a Refund?

You can return your product for a full refund within the first 30 days after delivery if you receive a defective product. After 30 days, the product is now only eligible for an even exchange should any defects arise. If you are returning an unopened or unused unit, you will be charged a 20% restocking fee.

Record Customer Information Below Have The Following Information Ready when Submitting A Warranty Claim

Order Number Order Date ____ Received Date

Customer Name Order Email

If your product requires troubleshooting, warranty service, or a return within the first 30 days, visit chargetech.com/contact/ or email us at


Phone Number _

support@charaetechsolutions.com

See previous page for more information on the included 1-year

材質: 道林紙100g

摺法: 彈簧摺



碩業科技股份有限公司

SANLIFE TECHNOLOGY CO.,LTD.

標題: CHT_PD-20K_說明書 料號: F010102773

日期/繪製者: 211026 陳玫惠

比例:1:1

單位: mm

正面