

Wall Mount & Table Top Charging Station

Model :WM9

A Description and Function:

The Wall Mount & Table Top Charging Station is made for charging up to eight (8) mobile devices simultaneously via adaptor plugs. The Charging Station is made for office and indoor use only.

* The cooling fans are heat activated when temperature > 45°C

B Intended Use:



Do not use the device in any way other than those described in the chapter 'Description and Function'. Use this device in dry interior rooms only. Failure to adhere to these instructions and notes on safety may cause fatal accidents, injuries and damages to persons and property.

1

C Notes on Safety:



ATTENTION! Only skilled electricians may assemble and disassemble the housing of the product. There is a risk of electric shock and short circuit!

This product is not a toy and should not be used by children. It contains small parts which can be swallowed and can injure when used inappropriately.

- Please install the system and devices attached to it in a way that persons cannot be injured or objects cannot be damaged.
- Dispose of all packing, incidentals and insulating materials safely to minimise risk of cutting or inhalation by children.
- Do not install the product in places with high temperatures, high humidity or any area that may come into contact with water.
- Do not install the product close to openings of air conditioners, or places with excessive amount of dust, smoke or vibrations.
- To avoid falling, position the product on horizontal or flat surfaces only.
- Do not alter the product or any of its accessories. Please carefully read 'Warranty and Liability'.
- Do not use any damaged parts.
- Plug and unplug all cables / adaptors slowly and carefully.

2

D Care, Maintenance, Storage and Transport



ATTENTION! There is a risk of electric shocks and short circuit!

- Ensure suitable packaging is used when the product is transported, e.g use the original packaging.
- For questions, defects, mechanical damages, malfunctions and other functional problems which cannot be resolved by this manual, please contact your dealer for repair or replacement, as described in the Chapter 'Warranty and Liability'.
- Please read and adhere to all instructions detailed in 'Specifications' and 'Intended Use'.
- The device is maintenance free. Use of the device is at the user's own risk.
- Always disconnect the AC Adaptor from the mains power socket first.
- Do not clean your product when the AC Adaptor is connected.
- Do not use cleaning supplies and ensure the device is completely dry before re-using.
- Do not install the device, or place the AC Adaptor or Power Cord, in a way that creates a trip hazard for the installer or user.

3

E Troubleshooting:


Problem	Help
The device does not charge	<ul style="list-style-type: none"> • When the device is charged completely, no charging is shown. • Check all connections for tight fitting. • Use only the fitting Charging Adaptor Plugs.
Failure of the Female USB function	Make Sure using a fitting and compatible USB charging cable.
Other problems	Consult your dealer.

F Specifications:


Model	WM9
Input Voltage	100~240V AC / 50~60 Hz
Output Voltage (AC Adaptor)	18V
Output Voltage (Charging Adaptors)	5V
Output Current	8 x 1.5A
Number of charging ports	8

4


G Connecting and Operating:




- 1 Drill four (4) * Ø8mm holes 48mm depth on to the wall where you would like to install the station. Then insert a plastic expand tube in each of the holes.



- 2 Fix the back mount onto the wall.




- 3 Connect the included Power Cord to the AC Adaptor then to the Charging Station.




- 4 Hang the station on the mount.
- 5 Secure tight the station on the mount by fastening the two (2) screws at the bottom.

5


H Replacing Charging Cables:



- 1 Take off 2 screws.
- 2 Take off the charging station.



- 3 Open the Front panel by unscrewing the five(5) screws.

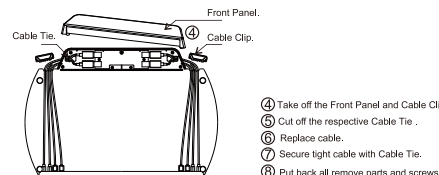

- 4 Take off the Front Panel and Cable Clip.
- 5 Cut off the respective Cable Tie .
- 6 Replace cable.
- 7 Secure tight cable with Cable Tie.
- 8 Put back all remove parts and screws.

6

I Package Content:

- 1pc Wall Mount & Table Top Charging Station
- 1pc 100 ~ 240V / 50~60 Hz AC Adaptor
- 1pc Power cord
- 1pc Manual
- 1pc Installation guide
- 8pcs Charging Cables
- 1set Wall Mount Bracket

J Warranty and Liability:

- We grants a conditional 1 year warranty for this device and 6 months warranty on any consumable parts such as charging cables and batteries from the date of purchase.
- The warranty only applies to the product and does not cover installation or vandalism.
- If any fault or damage is detected on the device, please contact your dealer and provide the purchase invoice as evidence of your purchase. Your dealer will attempt to troubleshoot the problem by asking you to describe the fault in detail. If the fault cannot be rectified, you will need to send the device to the manufacturer.
- The manufacturer is not liable for damages to persons or property caused by improper installation or operations not described in this guide. This includes, amongst others, any alteration and modification of the product and its accessories.
- Any use other than described in this user manual is not permitted, and caused loss of warranty, loss of guarantee, and non-liability.
- We reserve our right for misprints and changes to the device, packing or user manual.

7

K Note on Waste Disposal:



In according to the European WEEE directive, electrical and electronic equipment must not be disposed with consumers waste. The consumer is committed by law to deposit electrical and electronic devices to public collecting points or to the dealer at the end of the devices lifetime for free. Particulars are regulated in national right. The symbol on the product, in the manual or at the packaging alludes to these terms. With this kind of application of used devices you achieve an important share to environmental protection.

ATTENTION!

Please read the user manual completely and carefully. It is part of the product and includes important information for proper installation and use. Keep this guide to have it available, hen there are uncertainties, or the product will be passed on.

8